


## Allproof Drop-In Fire Collar Plastic Pipe in Concrete Floor (from 70mm) PVC, HDPE, PEX, PB, Acoustic and Aquatherm



### INSTALLATION INSTRUCTIONS:

1. Core drill hole to specified diameter to suit pipe size.
2. Install drop-in fire collar fixing with two metal pin anchors into the slab.
3. Ensure collar on underside of slab is exposed no greater than 60mm nor recessed more than 5mm into the slab.
4. Insert pipework through collar and apply 5mm Allproof MAS310 sealant over a PE backing rod at top of slab.

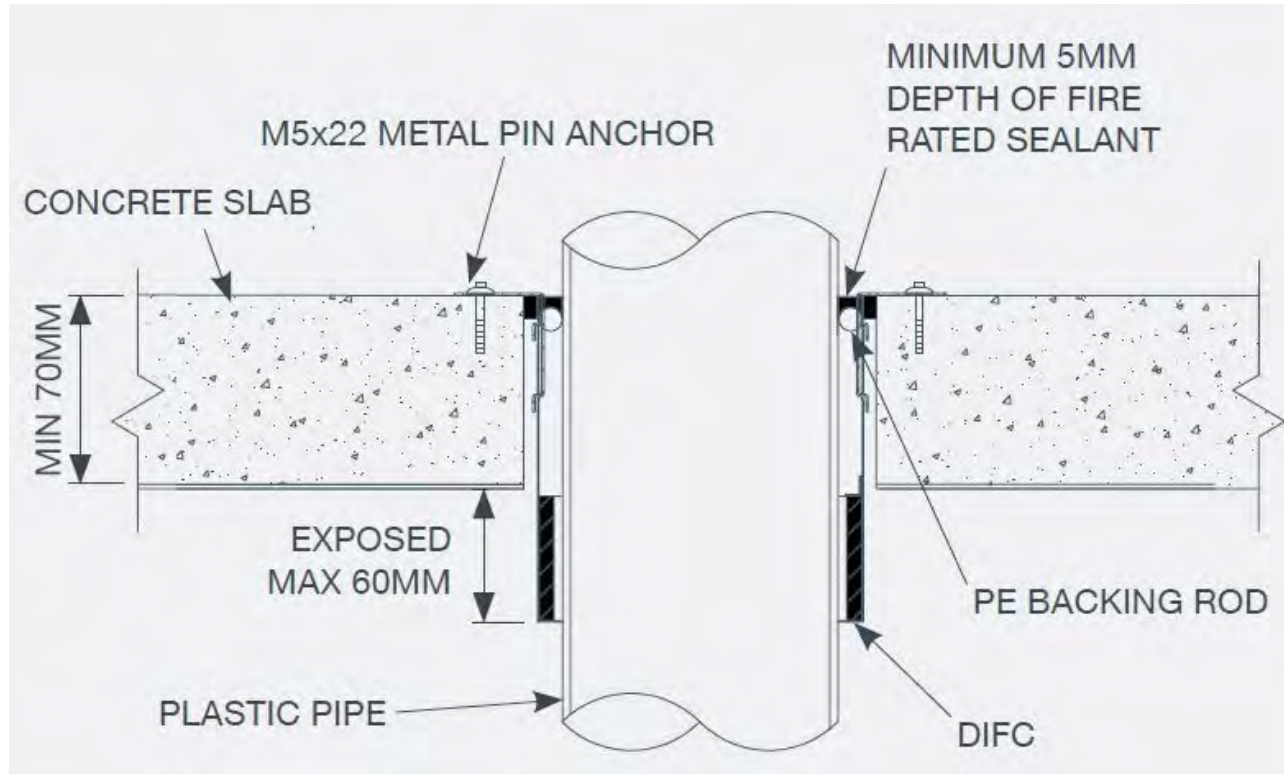

As a part of our policy of on-going product development and testing, we reserve the right to modify, alter or change product specifications without giving notice. All information contained in this document is given in good faith and is provided for guidance only. Any drawings provided are for illustrative purposes only. As Firestop Centre has no control over the methods or competence of installation and of prevailing site conditions, no warranties, expressed or implied, is intended to be given as to the actual performance of the product mentioned or referred to herein and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given.

# ALLPROOF

INDUSTRIES

Allproof Industries Ltd  
 17 Bay Park Place  
 Beach Haven, AK 0626

System/FPA Register ID# FC639

<b>Products</b>	Allproof Drop-In Fire Collar
<b>Application</b>	Fire stopping of various plastic pipes in rigid floors
<b>Construction</b>	Minimum floor thickness of 70mm and comprise aerated concrete or concrete

### Fire Classification:

<u>PVC pipe 40 - 150mm diam</u>	
in min 70mm slab	FRR -/60/60
in min 100mm slab	FRR -/120/120
<u>PVC including socket connection within collar 40 - 100mm diam</u>	
in min 70mm slab	FRR -/60/60
in min 100mm slab	FRR -/120/120
<u>HDPE pipe 40 - 150mm diam</u>	
in min 70mm slab	FRR -/60/60
in min 100mm slab	FRR -/120/120
<u>D-Blue PP-MD (Acoustic) 50 - 150mm diam</u>	
in min 70mm slab	FRR -/60/60
in min 100mm slab	FRR -/120/120
<u>PP-R SDR9 (Aquatherm) 32 - 125mm diam</u>	
in min 70mm slab	FRR -/60/60
in min 100mm slab	FRR -/120/120
<u>PP-R SDR11 (Aquatherm) 32 - 40mm diam</u>	
in min 70mm slab	FRR -/60/60
in min 100mm slab	FRR -/120/120
<u>PEX pipe 16mm diam up to</u>	FRR -/120/120
<u>PEX pipe 25mm diam up to</u>	FRR -/120/60
<u>Polybutylene 15mm diam up to</u>	FRR -/120/90
<u>Polybutylene 28mm diam up to</u>	FRR -/120/120

Sheet size:	Drawn date & no:
<b>A4</b>	<b>28/7/21</b>

Scale:	Drawn by:
<b>NTS</b>	<b>G.P</b>