Allproof Low Profile Fire Collar
PVC Plastic Floor Waste in Plasterboard Ceiling with Particleboard Floor

BRANZ Appraisal 1008
Technical Manual - Plumbing Pg 12
AS1530.4-2014   AS4072.1-2005

BRANZ

System/FPA Register ID# FC736

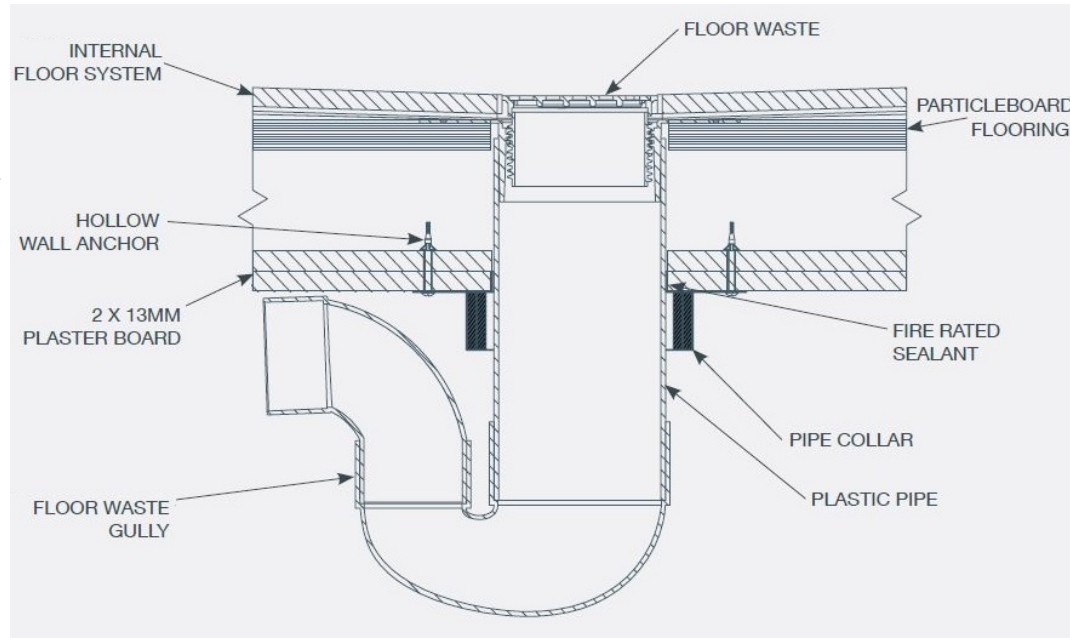|	
Products	Allproof Low-Profile Fire Collar
Application	Fire stopping of floor waste in plasterboard ceiling
Construction	Ceiling of 2 x 13mm fire board and 19mm particleboard floor above

Fire Classification:

PVC floor waste 100mm diam with penetration hole size up to 110mm

FRR -/90/0

INSTALLATION INSTRUCTIONS:

1. Ensure substrate around the pipe is flat and free from obstructions.

2. Seal the annular space between the plasterboard and the pipe with Allproof MAS310 fire sealant to a depth of at least 13mm

3. Open pipe collar and position around the pipe.

4. Slide tab through slot in pipe collar and fold back 180° to secure.

5. Secure collar using M4x8mm metal hollow wall anchors fixed directly into the plasterboard. Do not use fixings which rely on plastic or nylon components for grip.

Diagram labels: FLOOR WASTE, INTERNAL FLOOR SYSTEM, PARTICLEBOARD FLOORING, HOLLOW WALL ANCHOR, 2 X 13MM PLASTER BOARD, FIRE RATED SEALANT, PIPE COLLAR, PLASTIC PIPE, FLOOR WASTE GULLY

ALLPROOF
INDUSTRIES

Allproof Industries Ltd
17 Bay Park Place
Beach Haven, AK 0626

BRANZ Appraised
Appraisal No.1088 [2019]

For all technical details on the products specified please refer to the technical data sheets that can be found on www.firestopcentre.co.nz

Signed and approved:

Sheet size: **A4**	Drawn date & no: 28/7/21
Scale: **NTS**	Drawn by: G.P