

RLA FirePro FR Sealant Concrete Wall Linear Gaps Vertical 50mm, Horizontal 40mm

## Fire Lab

Test Report PF21046, Page 5

AS1530.4-2014 AS4072.1-2005

## System ID# FC292

Products

RLA FirePro FR Sealant

Application

Fire stopping of linear gaps in concrete walls or between

concrete slabs

Construction

Concrete wall slab min 180mm

thick

## **Fire Classification**

Up to 50mm vertical gap with 30mm deep RLA FirePro FR sealant flush with concrete face

FRR -/360/360

Up to 40mm horizontal gap with 30mm deep RLA FirePro FR sealant flush with concrete face


FRR -/360/360

## INSTALLATION INSTRUCTIONS 1. Ensure surfaces are free of grease or other contaminants.

2. Insert polystyrene backing rod or mineral wool backing leaving a 30mm recess (nominal).

3. Apply RLA Firepro FR sealant to a depth of 30mm both sides flush with concrete face.

NOTE: Also tested with recessed stitch plate covered with fire mortar. For details see Test Report PF21046

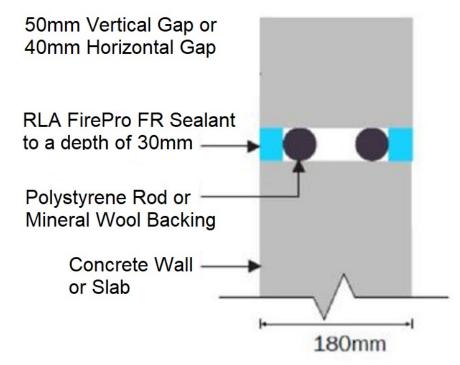

As a part of our policy of on-going product development and testing, we reserve the right to modify, alter or change product specifications without giving notice. All information contained in this document is given in good faith and is provided for guidance only. Any drawings provided are for illustrative purposes only. As Firestop Centre has no control over the methods or competence of installation and of prevailing site conditions, no warranties, expressed or implied are intended to be given as to the actual performance of the product mentioned or referred to herein and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given.

For all technical details on the products specified please refer to the technical data sheets that can be found on www.firestopcentre.co.nz

Signed and approved:



**RLA Polymers Pty Ltd** 215 Colchester Rd, Kilsyth VIC 3137, AUSTRALIA

Sheet size: Α4

Drawn date & no: 20/8/23