

# FIRESTOP CENTRE


Authorised New Zealand Distributor
Ph (09) 483 4000 www.firestopcentre.co.nz

## RLA FirePro FR Sealant Pbd Wall Linear Gaps

Vertical 20mm, Horizontal 40mm (with cable)

#### INSTALLATION INSTRUCTIONS

- 1. Ensure surfaces are free of grease or other contaminants.
- 2. Apply RLA Firepro FR sealant to the depth of the plasterboard (nominal 26mm) on both sides flush with the plasterboard face.
- A cable bundle max 20mm diam may penetrate the head track and be sealed with a cone of RLA FirePro FR sealant 50mm x 70mm as shown in diagram.

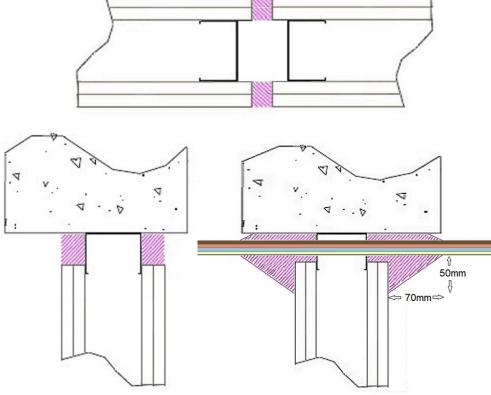

As a part of our policy of on-going product development and testing, we reserve the right to modify, alter or change product specifications without giving notice. All information contained in this document is given in good faith and is provided for guidance only. Any drawings provided are for illustrative purposes only. As Firestop Centre has no control over the methods or competence of installation and of prevailing site conditions, no warranties, expressed or implied are intended to be given as to the actual performance of the product mentioned or referred to herein and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given.

For all technical details on the products specified please refer to the technical data sheets that can be found on www.firestopcentre.co.nz

Signed and approved:



Test Reports PF22076, pg 26 and PF22077, pgs 21,22 AS1530.4-2014 AS4072.1-2005

### System ID# FC347

Products RLA FirePro FR Sealant

**Application** Fire stopping of linear gaps in

plasterboard walls (with cable)

**Construction** Plasterboard wall 2 x 13mm

min 116mm thick

#### Fire Classification

**Up to 20mm vertical gap** with 26mm deep RLA FirePro FR sealant flush with plasterboard face

FRR -/120/120

**Up to 40mm horizontal gap** against head track with 26mm deep RLA FirePro FR sealant each side flush with plasterboard face

FRR -/120/120

**Up to 40mm horizontal gap** against head track with 26mm deep RLA FirePro FR sealant each side flush with plasterboard face and cable bundle max 20mm with cone of sealant

FRR -/120/120



RLA Polymers Pty Ltd 215 Colchester Rd, Kilsyth VIC 3137, AUSTRALIA

Sheet size:

Drawn date & no: 20/8/23